

TempEase HRCII Controllers HRCII Modules Advanced Technology



Technical Specifications

	05	08	12
Input Voltage	240VAC 3P		
Output Voltage	240VAC 1P		
Amps Per Zone	15 Amp		
Sensor Type	T/C J or K		
Range	32 - 84.2 °F		
Control Accuracy	+/- 0.1%		
Output	Zero Cross Phase Angle		

Alarms & Features

- Thermocouple Break
- Shorter Inverse
- Heater Failure, or Overload
- TC & Heater Disconnect
- Fuse Alarm
- Over Voltage Power Supply and Heater Protection
- TC Protection
- Soft Start / Moisture Bake Out
- Limit Max Current Load



Technical Features

- Modbus Communication
- Alarm Output
- Remote Standby
- Selectable Auto/Manual Mode
- Triac Indicator/Open Heater
- PID Power Output
- High Temperature Indicator
- Low Temperature Indicator
- Automatic/Manual Mode Switch
- Automatic/Manual Mode Indicator
- Burned Out Fuses Indicator
- Open TC Indicator
- Reversed TC Connection Indicator
- Electrical Short TC Indicator
- Individual Boost Indicator
- Individual Stand By Indicator





HRTC-B1 Hot Runner Temperature Controller Module \$195/each

5-ZONE MAINFRAME



HRCII-05.....\$2,150

12-ZONE MAINFRAME



HRCII-12.....\$3,890

20-ZONE MAINFRAME



HRCII-20.....\$6,765

8-ZONE MAINFRAME




HRCII-08.....\$2,875

16-ZONE MAINFRAME



HRCII-16.....\$5,750


24-ZONE MAINFRAME

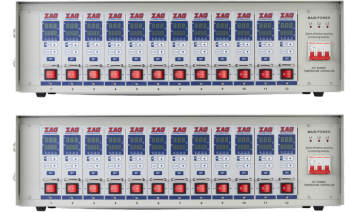

HRCII-24.....\$7,780

Step-Down Transformer Kits (from 480 VAC to 240 VAC)

ITEM NUMBER	POWER CAPACITY	PRICING
TA-6	6 KVA	TBD
TA-9	9 KVA	TBD
TA-15	15 KVA	TBD
TA-30	30 KVA	\$5,900

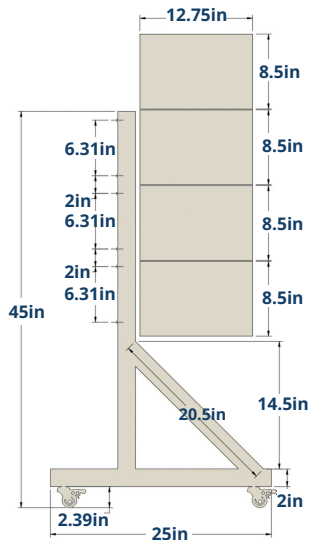

Universal Floor Stand

The Universal Floor Stand will accommodate all 15 or 30 amp Mainframes from one to four sections high. Stand is made from heavy gauge steel and includes locking casters (400 lb. rating). All assembly and Mainframe mounting hardware is included. Heavy duty floor stand available for larger systems (1000 lb. rating).

MFS5-12 Floor Stand for Hot Runner Controller.....\$245/each

